



REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE			2020/02/23
B					
C					

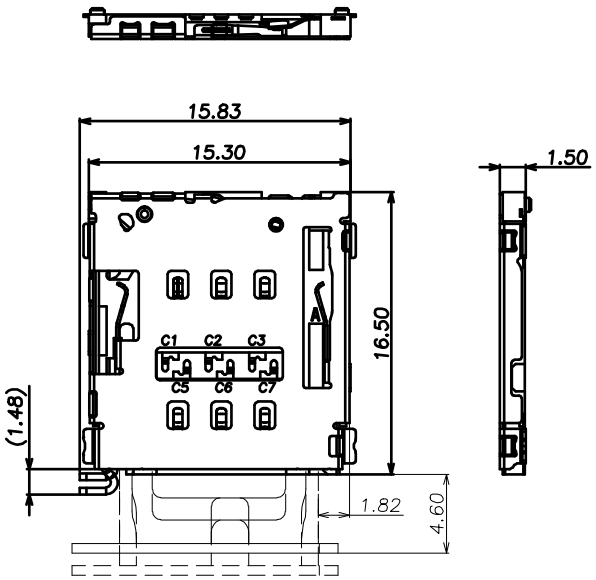

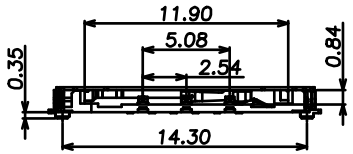


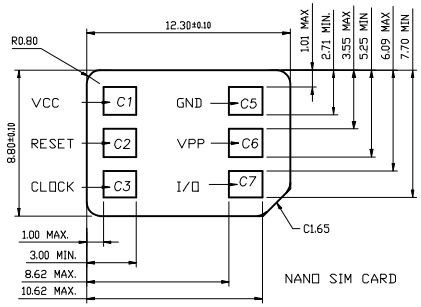

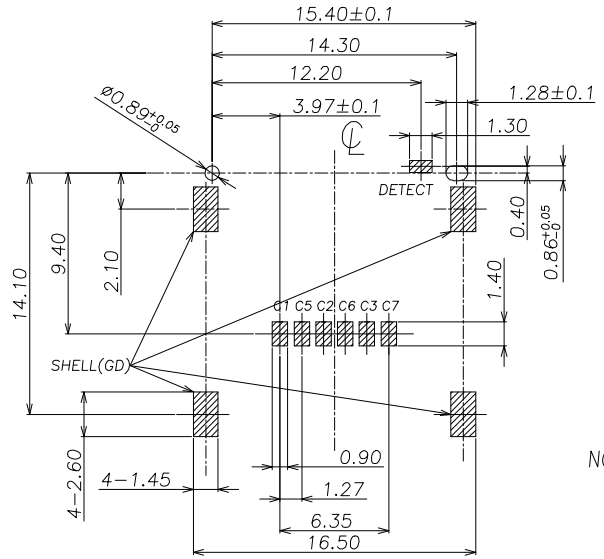

RECOMMENDED PC BOARD LAYOUT

TOLERANCE: ±0.05 (TOP VIEW)



NOTES:

1) MATERIAL:
   - 1-1 HOUSING:THERMOPLASTIC,UL 94V-0;COLOR:BLACK
   - 1-2 SHIELDED:STAINLESS STEEL
   - 1-3 CONTACT:COPPER ALLOY
   - 1-4 SWITCH PIN:COPPER ALLOY

2) FINISH:
   - 2-1 CONTACT: Au PLATING ON CONTACT AREA (SEE P/N DESCRIPTION) 50u" MIN NICKEL UNDERPLATING OVER ALL 1u"MIN AU PLANTING ON SOLD AREA,
   - 2-2 SHIELDED:1u" MIN Au PLATING ON SECURED AREA

3) PRODUCT SPECIFICATIONS:
   - 3-1 VOLTAGE RATING: 50V
   - 3-2 WITHSTANDING VOLTAGE: AC250V R.M.S
   - 3-3 CURRENT RATING: 0.5A
   - 3-4 INSULATION RESISTANCE: 1000MEG.OHM MIN AT DC 250V
   - 3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX
   - 3-6 OPERATION TEMPERATURE: -20° TO +85°

CUSTOMER DRAWING

东莞市卓连电子有限公司

GENERAL TOLERANCE
X.
.X ±0.20
.XX ±0.15
.XXX ±0.10

ANGEL TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°

DRAWING		TITLE:	1.80卡托SMD SIM卡座
APPROVED		P/N:	ZL-SM08-061500
DATE	2020.02.23	DRAWING NO.	

UNIT mm | SCALE 1:1 | SIZE A4 | SHEET 1of1 | REV A1